


Current Sensor A3G06

Model A3G06-10A-1.52VAC-60Hz
 Serial 000223-1
 10 k load across sensor, RDC=975
 Data taken on 02/23/00

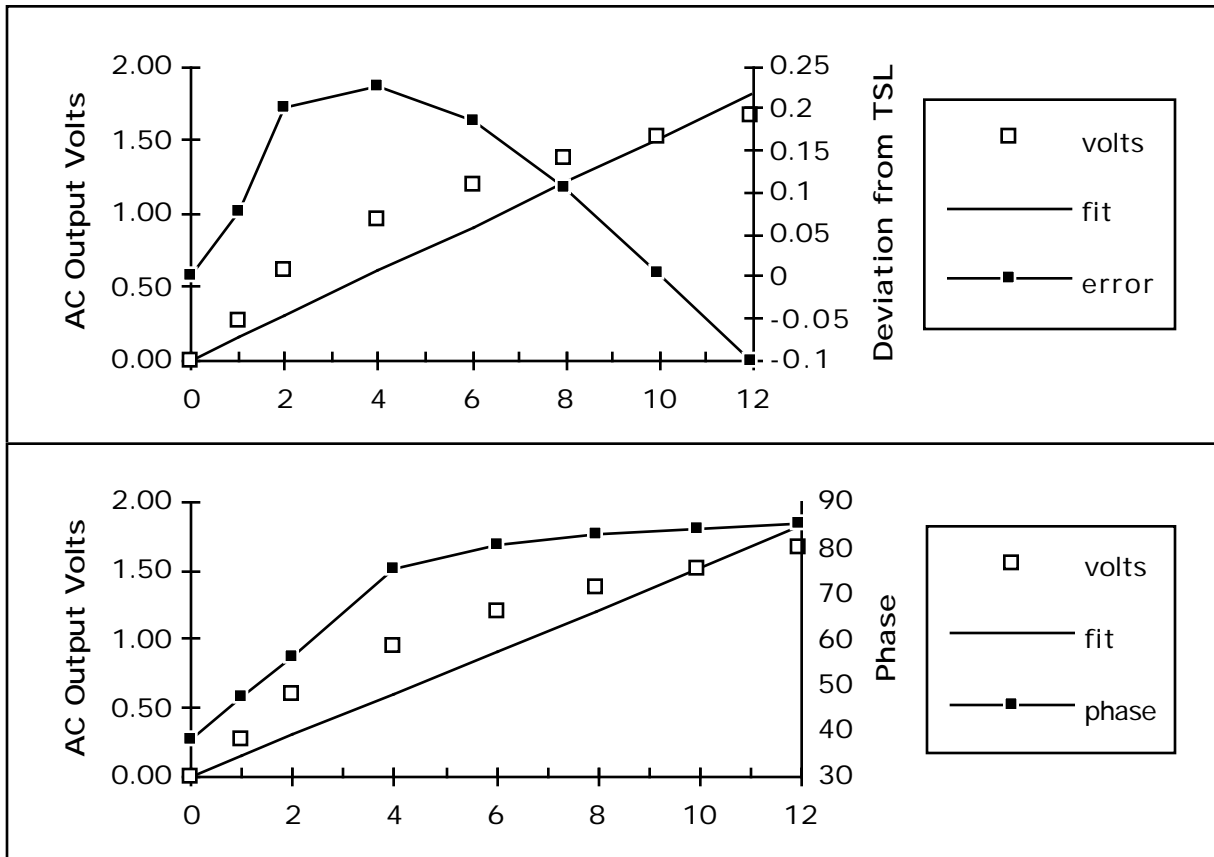

Amps	volts	fit	error	phase
0.00	0.00	0.00	0.0%	38.2
1.00	0.27	0.15	7.7%	47.2
1.99	0.61	0.30	20.2%	56.2
3.98	0.95	0.60	22.8%	75.3
6.00	1.19	0.91	18.6%	80.7
7.96	1.37	1.21	10.7%	82.9
9.95	1.52	1.51	0.5%	84.1
11.94	1.66	1.81	-10.2%	85.2

Smith Research & Technology, Inc.



3109 N. Cascade Ave., Bldg. #201
 Colorado Springs, CO 80907-5190
 719 634 2259, FAX 719 634 2601