


Captive stranded wires may be replaced with 4-40 studs on special order.

Black

Red

Potting side

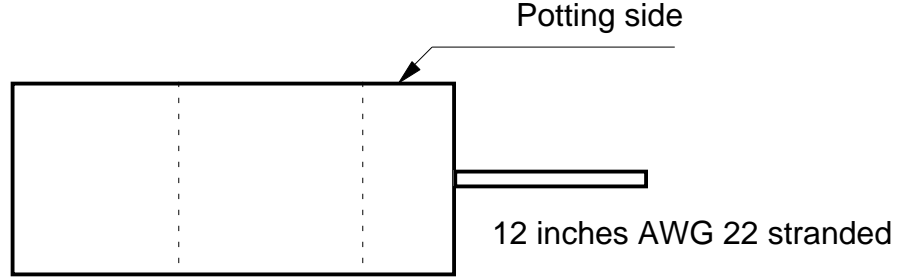

Friday, September 25, 1998 at 10:03:15


E case

Smith Research & Technology, Inc.



3109 N. Cascade Ave., Bldg. #201
 Colorado Springs, CO 80907-5190
 719 634 2259, FAX 719 634 2601

Inductive AC voltage and current sensors



Note 3:
 + indicates collector for switches, positive for DC output sensors. For AC output sensors the + lead will be nearly in phase with current entering the sensor on the potting side.

Dimensions in inches, ± 0.010 unless noted.